

KEY FEATURES

- ✓ Gripper with F/T sensors at the fingertips
- ✓ Detects workpiece using proximity sensors
- ✓ Detects risk of slipping before it happens
- ✓ Precise and simple depth compensation
- ✓ Integrated force-controlled insertion software
- ✓ Force/Torque sensor for enabling precise machine tending, assembly jobs and collaborative operations


TECHNICAL SPECIFICATIONS


RG2-FT general properties	Min	Typical	Max	Units
Total stroke (adjustable)	0	-	100	[mm]
Finger position resolution	-	0,1	-	[mm]
Gripping force (adjustable)	3	-	40	[N]
Reversing backlash	0,2	0,4	0,6	[mm]
Ambient operating temperature	5	-	50	[°C]
Product weight	-	0.77	-	[Kg]
Power consumption	6.5	-	22	[W]

Force sensor properties	Fxy	Fz	Txy	Tz
Nominal capacity (N.C.)	20 N	20 N	0.8 Nm	0.8 Nm
Noise free resolution	0.0098 N	0.039 N	0.008 Nm	0.005 Nm
Single axis deformation at N.C.	0.4 mm	0.5 mm	2°	5°

Proximity sensor properties	Min	Typical	Max	Units
Sensing range	0	-	100	[mm]
Resolution*	3	1	0.5	[mm]

* the actual resolution depends on the object properties (e.g. surface type and color)

MECHANICAL DIMENSIONS

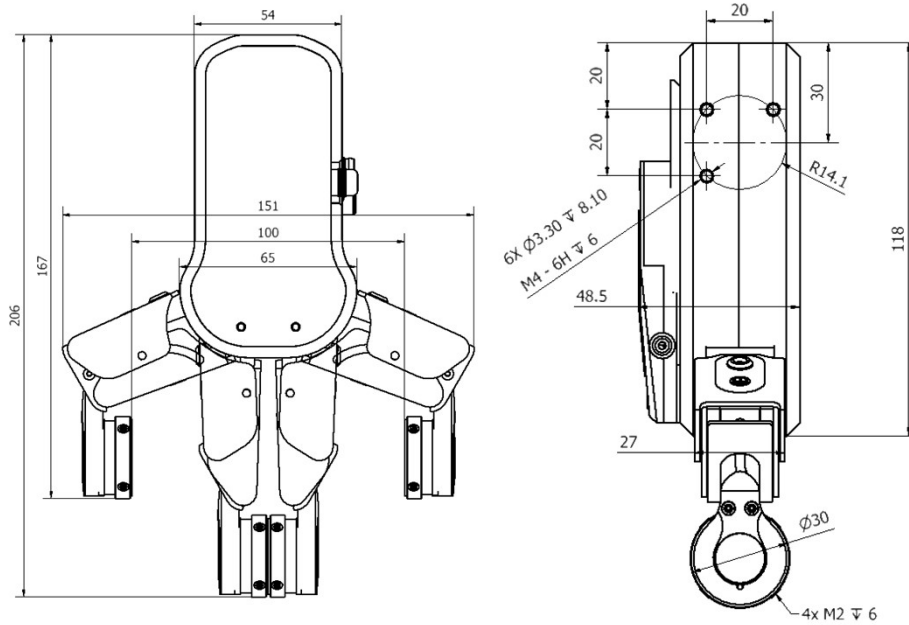

GRIPPER WORKING RANGE

